



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

Neoprene - 60 Durometer

Black neoprene rubber is recommended for service in moderate chemicals and acids, ozone, oils, fats, greases and many oils and solvents.

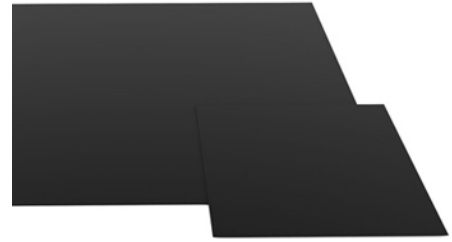

Neoprene - 60 Durometer	Physical Properties
Color	Black
Tensile Strength (min.) ASTM D412	900 psi
Service Temperature	-22 to 190 F
Ultimate Elongation (min.) ASTM D412	300 %
Weight Per Sq. Ft. 1/8 Thick	0.9 lb
Compression Set (max.) ASTM D395B	80 %
Oil Immersion (903 Oil, 70 hr. @ 212 F) ASTM D471	120 max. %
Heat Resistance	
Change in Hardness (max.) ASTM D573/2240	+/-15
Change in Tensile (max.) ASTM D573/412	+/-30
Change in Elongation (max.) ASTM D573/412	-50