



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

PVC Foam - Low Density

Equalseal.com Low Density PVC Foam with pressure sensitive adhesive on one side is used in applications requiring a seal where there are tight radius curves and stays pliable at temperatures of -4 F to 172 F.

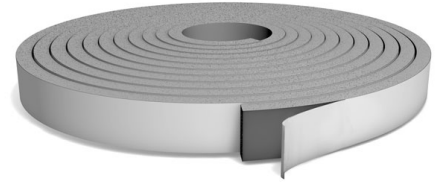

PVC Foam - Low Density		Physical Properties
Color		Grey
Density		5.5 to 10 lb/ft3
Compression Deflection	ASTM D1667	2.2 psi
Tensile Strength	ASTM D412	20 psi
Ultimate Elongation	ASTM D412	110 %
Service Temperature		-4 to 172 ° F
Force to Compress to 25%	ASTM D1667	3 to 4 psi
Flammability	MVSS-302	Self Extinguishing
Durometer	Shore 00 ASTM d2240	24