



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

## PVC Foam - Low Density

Equalseal.com Low Density PVC Foam with pressure sensitive adhesive on one side is used in applications requiring a seal where there are tight radius curves and stays pliable at temperatures of -4 F to 172 F.

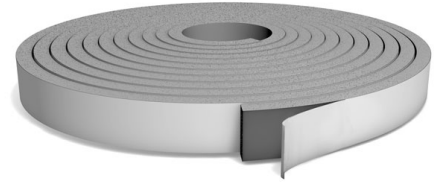

PVC Foam - Low Density	Physical Properties
Color	Grey
Density	5.5 to 10 lb/ft <sup>3</sup>
Compression Deflection <small>ASTM D1667</small>	2.2 psi
Tensile Strength <small>ASTM D412</small>	20 psi
Ultimate Elongation <small>ASTM D412</small>	110 %
Service Temperature	-4 to 172 ° F
Force to Compress to 25% <small>ASTM D1667</small>	3 to 4 psi
Flammability <small>MVSS-302</small>	Self Extinguishing
Durometer <small>Shore 00 ASTM d2240</small>	24