



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

PVC Foam - Medium Density

Equalseal.com medium density PVC Foam with pressure sensitive adhesive on one side is used in applications requiring a combination of flexibility and strength. Its density allows for clean cutting and fastener penetration and stays pliable at temperatures of -4 F to 172 F.

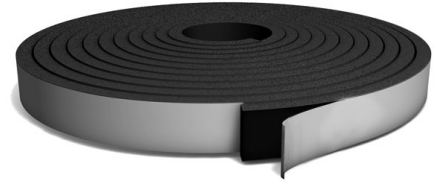

PVC Foam - Medium Density

Physical Properties

Color	Black
Density <small>ASTM D1667</small>	9 to 13 lb/ft ³
Compression deflection <small>ASTM D1667</small>	3.5 psi
Tensile Strength <small>ASTM D412</small>	35 psi
Ultimate Elongation <small>ASTM D412</small>	140 %
Service Temperature	-20 to 172 ° F
Force to Compress to 25% <small>ASTM D1667</small>	6.5 psi
Flammability <small>MVSS-302</small>	Self Extinguishing
Durometer <small>Shore 00 ASTM D2240</small>	36