



**equalseal.com**

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

## PVC Foam - Medium Density

Equalseal.com medium density PVC Foam with pressure sensitive adhesive on one side is used in applications requiring a combination of flexibility and strength. Its density allows for clean cutting and fastener penetration and stays pliable at temperatures of -4 F to 172 F.

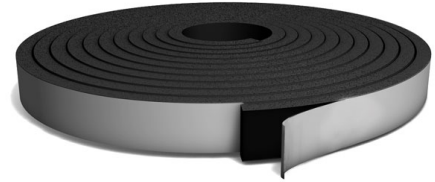

PVC Foam - Medium Density		Physical Properties
Color		Black
Density	ASTM D1667	9 to 13 lb/ft3
Compression deflection	ASTM D1667	3.5 psi
Tensile Strength	ASTM D412	35 psi
Ultimate Elongation	ASTM D412	140 %
Service Temperature		-20 to 172 ° F
Force to Compress to 25%	ASTM D1667	6.5 psi
Flammability	MVSS-302	Self Extinguishing
Durometer	Shore 00 ASTM D2240	36