




equalseal.com  
PO Box #13665  
Fairlawn OH 44334  
Phone: (330) 984-0747  
Fax: (330) 752-4119

## PVC Foam - Medium Density

Equalseal.com medium density PVC Foam with pressure sensitive adhesive on one side is used in applications requiring a combination of flexibility and strength. Its density allows for clean cutting and fastener penetration and stays pliable at temperatures of -4 F to 172 F.

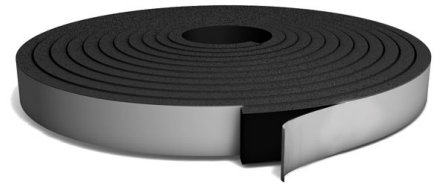

### PVC Foam - Medium Density

### Physical Properties

|  |                            |
|--|----------------------------|
| Color  | Black                      |
| Density <small>ASTM D1667</small>                  | 9 to 13 lb/ft <sup>3</sup> |
| Compression deflection <small>ASTM D1667</small>   | 3.5 psi                    |
| Tensile Strength <small>ASTM D412</small>          | 35 psi                     |
| Ultimate Elongation <small>ASTM D412</small>       | 140 %                      |
| Service Temperature                                | -20 to 172 ° F             |
| Force to Compress to 25% <small>ASTM D1667</small> | 6.5 psi                    |
| Flammability <small>MVSS-302</small>               | Self Extinguishing         |
| Durometer <small>Shore 00 ASTM D2240</small>       | 36                         |