



**equalseal.com**

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

## Equal Seal EQ750G

Equal Seal Equal Seal EQ 750G NBR is recommended for use in sealing against oils, solvents, fuels, non-aggressive solutions, and service conditions up to 750 F.

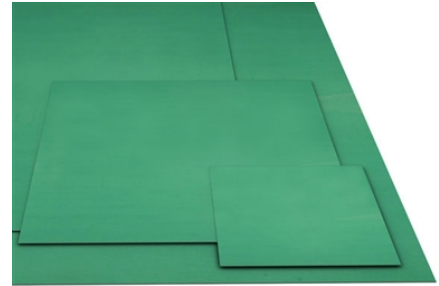

Equal Seal **EQ-750G**

Equal Seal EQ750G		Physical Properties
Color		Green
Composition		Aramid Fiber / NBR
Density		109 lb/cu. ft.
Service Temperature		-100 to 750 ° F
Service Pressure		0 to 1380 psi
Compressibility ASTM F36		7 to 17 %
Recovery ASTM F36		45 %
Thickness Increase (max%) ASTM F146 (ASTM Oil Fuel B)		15 %
Thickness Increase (max%) ASTM F146 (Oil IRM 903, 5Hr, 302°F)		12 %
Weight Increase (max%) ASTM F146 (ASTM Oil Fuel B, 5hrs, 70°F)		15 %
ASTM F104 Line Call out		F712120E22M5