




equalseal.com  
PO Box #13665  
Fairlawn OH 44334  
Phone: (330) 984-0747  
Fax: (330) 752-4119

## Equalseal EQ750G

Equalseal Equalseal EQ 750G NBR is recommended for use in sealing against oils, solvents, fuels, non-aggressive solutions, and service conditions up to 750 F.

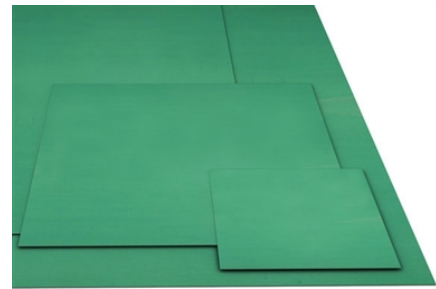

Equalseal **EQ-750G**

Equalseal EQ750G	Physical Properties
Color	Green
Composition	Aramid Fiber / NBR
Density	109 lb/cu. ft.
Service Temperature	-100 to 750 ° F
Service Pressure	0 to 1380 psi
Compressibility ASTM F36	7 to 17 %
Recovery ASTM F36	45 %
Thickness Increase (max%) ASTM F146 (ASTM Oil Fuel B)	15 %
Thickness Increase (max%) ASTM F146 (Oil IRM 903, 5Hr, 302°F)	12 %
Weight Increase (max%) ASTM F146 (ASTM Oil Fuel B, 5hrs, 70°F)	15 %
ASTM F104 Line Call out	F712120E22M5