




equalseal.com
PO Box #13665
Fairlawn OH 44334
Phone: (330) 984-0747
Fax: (330) 752-4119

Santoprene 241-55 NSF 51/61 - 60 Duro

Santoprene NSF-61 grade is a Thermoplastic Elastomer (TPE) made from a cross link mixture of EPDM rubber and Polypropylene. This combination offers excellent flexibility and durability that are consistent with natural rubber. It is environmentally age resistant in both hot and cold extreme environments. Its excellent electrical properties make Santoprene the preferred sealing and isolating material over Neoprene and EPDM rubber. Santoprene NSF-61 materials are certified to meet the required specification for applications concerning potable water

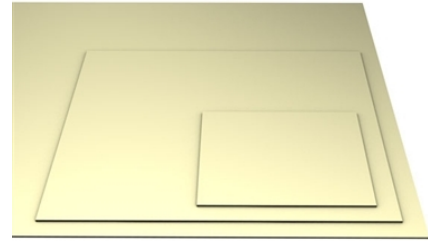

NSF-61 Certified
Santoprene 

Santoprene 241-55 NSF 51/61 - 60 Duro	Physical Properties
Color	Cream
Durometer Shore A ISO 868	60 +/-5
Service Temperature	-50 to 275 ° F
Tensile Strength ASTM D412	653 psi
Ultimate Elongation ASTM D412	450 %
Compression Set ASTM D395 B	23 %
Dialectric Strength	500 V/mil