




equalseal.com  
PO Box #13665  
Fairlawn OH 44334  
Phone: (330) 984-0747  
Fax: (330) 752-4119

## Silicone Sponge - AMS 3195 - Medium Density

Equalseal.com Medium Density Silicone Closed Cell Sponge is an excellent material for gasketing applications that require a soft compressible material. It is resistant to extreme temperatures and offers good compression set. Our Silicone sponge is also UV/Ozone resistant and meets a variety of material specifications.

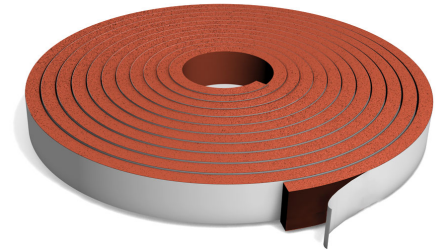

Silicone Sponge - AMS 3195 - Medium Density	Physical Properties
Color	Red/Orange
Density Under 1/4 Thick	0.025 lbs/in <sup>3</sup>
Density Over 1/4 Thick	0.02 lbs/in <sup>3</sup>
Tensile Strength	100 psi
Service Temperature	-103 to 450 ° F
Compression Set 22 Hrs. at 212 F	29 %
Compression Deflection	11 PSI
Thermal Conductivity BTU in/hr ft <sup>2</sup> F	0.6 BTU in/hr ft <sup>2</sup> F