




equalseal.com
PO Box #13665
Fairlawn OH 44334
Phone: (330) 984-0747
Fax: (330) 752-4119

Silicone Sponge - AMS 3195 - Medium Density

Equalseal.com Medium Density Silicone Closed Cell Sponge is an excellent material for gasketing applications that require a soft compressible material. It is resistant to extreme temperatures and offers good compression set. Our Silicone sponge is also UV/Ozone resistant and meets a variety of material specifications.

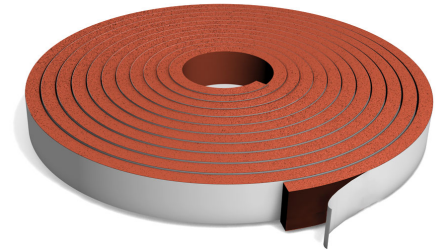

| Silicone Sponge - AMS 3195 - Medium Density | Physical Properties |
|--|---------------------------------|
| Color | Red/Orange |
| Density Under 1/4 Thick | 0.025 lbs/in ³ |
| Density Over 1/4 Thick | 0.02 lbs/in ³ |
| Tensile Strength | 100 psi |
| Service Temperature | -103 to 450 ° F |
| Compression Set 22 Hrs. at 212 F | 29 % |
| Compression Deflection | 11 PSI |
| Thermal Conductivity BTU in/hr ft ² F | 0.6 BTU in/hr ft ² F |