



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

Equal Seal EQ706

EQ 706 (Black) is a premium grade, in-organic fiber and NBR sheet formulated for high temperatures applications. Recommended for use in sealing against both saturated and superheated steam, along with high temp petroleum derivatives. Good for service conditions up to 1000 F and continuous temps to 800 F.

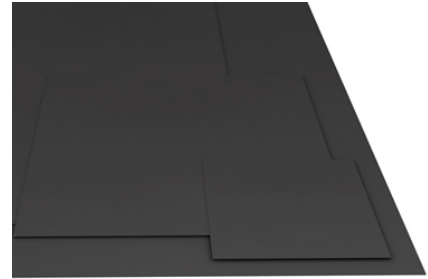

Equal Seal **EQ-706**

Equal Seal EQ706	Physical Properties
Color	Black
Composition	Inorganic Fiber/NBR
Service Temperature	1000 ° F
Maximum Continuous Temperature	800 ° F
Compressibility (After 1 hour at 210° F) - ASTM F36/J	7 to 17 %
Recovery ASTM F36A (Minimum)	40 %
Creep Relaxation 7250 psi / 572° F	25 %
Torque Retention DIN 52913	6230 psi
Tensile Strength ASTM F152	1305 psi
Density	106 lb/cu. ft.
Service Pressure	0 to 1480 psi