



**equalseal.com**

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

## Neoprene - Nylon Insert

Neoprene compound with one or more nylon fabric plies, for service where dimensional stability is required. Neoprene rubber resists degradation from sun, ozone and weather. It maintains its strength, flexing, twisting and elongation very well over a wide temperature range while having outstanding physical toughness. Fabric content per thickness is one ply for 1/16" and 3/32". One or two plies available for 1/8" through 1/4".

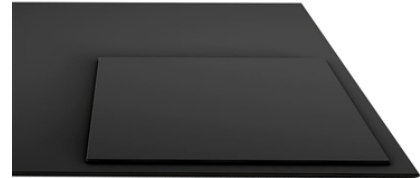

### Neoprene - Nylon Insert

### Physical Properties

Color

Black

Durometer Shore A

60

Tensile Strength

750 psi

Service Temperature

-20 to 170 ° F

Fabric Type

5 Oz. Nylon