



equalseal.com

PO Box #13665


Fairlawn OH 44334

Phone: (330) 984-0747

Fax: (330) 752-4119

## Neoprene - Nylon Insert

A blended Neoprene compound with one or more polyester fabric plies, for service where dimensional stability is required. Suitable for use where moderate oil resistance is required and where hot and cold water and gases are being conveyed. Fabric content per thickness is one ply for 1/32" and 1/16", two plies for 1/8", three plies for 3/16", and four plies for 1/4".

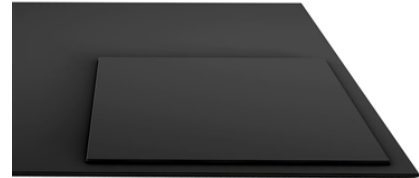

### Neoprene - Nylon Insert

### Physical Properties

Color

Black

Durometer Shore A

70

Tensile Strength

1000 psi

Service Temperature

-30 to 200 ° F

Fabric Type

4 Oz. Polyester